
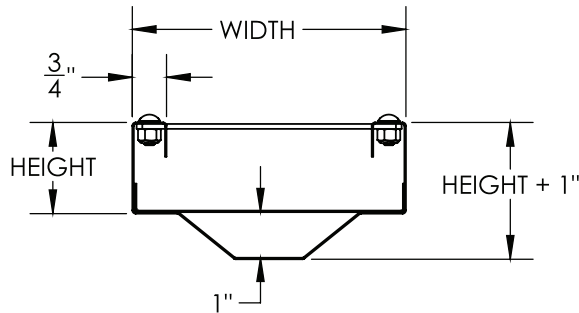


Cable Tray / RaceTray / Center Hung RTCX-XX-HT-PX

RaceTray™ Fittings

HORIZONTAL TEE

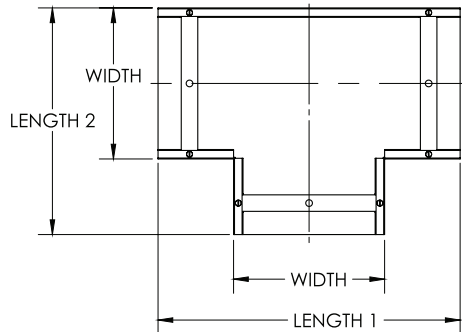

Notes

For Steel Center Hung RaceTray.

- 1.) RaceTray material: G60 Steel.
- 2.) Mount tray using a box beam or threaded rod (by others) attach to pre-mounted support bars as shown.
- 3.) Connect fitting to existing RaceTray by using RTCX-XX-CP couplings (2-provided per tee). Attach RT-669-BRAID grounding straps (ordered separately).
- 4.) Install RTCX-XX-SCL seam clips (2-provided per tee) centered about the RaceTray fitting seams, be sure the clip strap is tight. Install supplied #8-32x1/2 tek screws thru 4x pilot holes into top flange of tray.
- 5.) Other color & finish options available speak with MonoSystems to choose.
- 6.) Views for reference - do not scale.



ORDERING DATA EXAMPLE:

RTCX-XX-HT-PX

HEIGHT

- 2 = 2" HIGH
- 3 = 3" HIGH
- 4 = 4" HIGH



WIDTH

- 6 = 6" WIDE
- 9 = 9" WIDE
- 12 = 12" WIDE
- 18 = 18" WIDE
- 24 = 24" WIDE


COLOR

- W = WHITE
- B = BLACK


TRAY WIDTH	LENGTH 1	LENGTH 2
6" WIDE	15"	10.5"
9" WIDE	19"	14"
12" WIDE	24"	18"
18" WIDE	32"	25"
24" WIDE	38"	31"

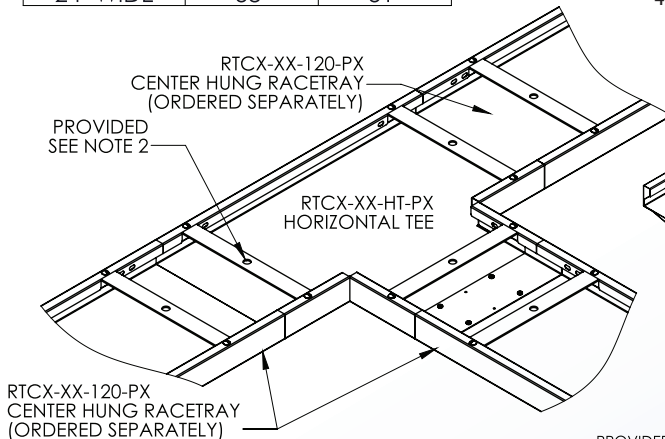

RTCX-XX-HT
HORIZONTAL TEE



RTCX-XX-CP
COUPLING PLATE
SEE NOTE 3



PROVIDED TO ASSIST
IN INSTANCES OF
UNEVEN ALIGNMENT

RTCX-XX-SCL
SEAM CLIP
SEE NOTE 4

Niedax MonoSystems, Inc.
180 Hopkins Street
Buffalo, NY 14220
1 888.764.7681
Phone: 914.934.2075
Fax: 914.934.2190
MonoSystems.com

