

Cable Tray / Trough Tray SVXX-HT-XXXX

TroughTray™ Fittings



Manufactured in the USA by MonoSystems, Inc.



HORIZONTAL TEE, VENTED BOTTOM

Notes

- 1.) Ordered as each.
- 2.) Exact vent pattern and quantity will vary depending on size.
- 3.) One pair of u-splice and 3/8" mounting hardware provided.
- 4.) Recommended torque: for 3/8" fasteners: 25-35 ft-lbs [33.9-47.5 N-m].
- 5.) Views for reference - do not scale.

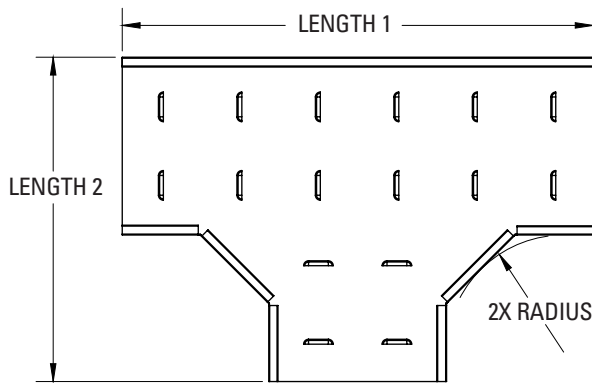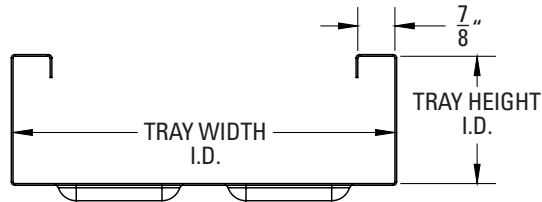

FILE: 80034

ORDERING DATA EXAMPLE:

SVXX-HT-XXXX

STYLE MATERIAL TRAY HEIGHT RADIUS TRAY WIDTH


V = VENTED
BOTTOM

P = STEEL PRE-GALV
G = HDGAF
A = ALUMINUM
4SS = 304 STAINLESS STEEL
6SS = 316 STAINLESS STEEL


3 = 3" HIGH
4 = 4" HIGH
6 = 6" HIGH

12 = 12" RADIUS
24 = 24" RADIUS

06 = 6" WIDE
09 = 9" WIDE
12 = 12" WIDE
18 = 18" WIDE
24 = 24" WIDE
36 = 36" WIDE

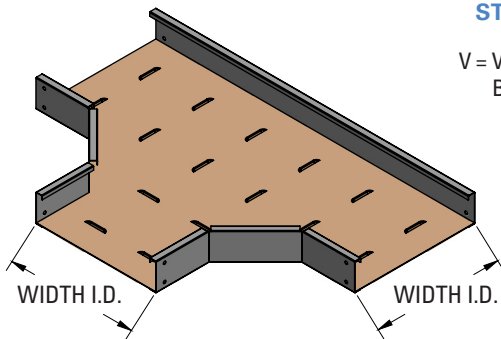

*ADDITIONAL RADIUS, SOLID BOTTOM,
AND PAINTED OPTIONS AVAILABLE
SPEAK WITH MONOSYSTEMS TO CHOOSE



ALUMINUM P/N	ALUMINUM GAUGE	STEEL GAUGE	HEIGHT (H)	WIDTH (W)	FOR 12"R LENGTH 1	FOR 24"R LENGTH 1	FOR 12"R LENGTH 2	FOR 24"R LENGTH 2
SVXX-HT-XX06	0.063"	20	3," 4" OR 6"	6"	36"	54"	21"	30"
SVXX-HT-XX09	0.063"	20	3," 4" OR 6"	9"	39"	57"	24"	33"
SVXX-HT-XX12	0.063"	20	3," 4" OR 6"	12"	42"	60"	27"	36"
SVXX-HT-XX18	0.063"	20	3," 4" OR 6"	18"	48"	66"	33"	42"
SVXX-HT-XX24	0.063"	20	3," 4" OR 6"	24"	54"	72"	39"	48"
SVXX-HT-XX36	0.080"	18	3," 4" OR 6"	36"	66"	84"	51"	60"



4 International Drive
Rye Brook, NY 10573
Toll Free: 1 888.764.7681
Phone: 914.934.2075
Fax: 914.934.2190
MonoSystems.com

MonoSystems™
wire management. managed.